


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
△		图面更新	HW	04/11/06*
△		工程变更: 去掉电压、电流刻字	WLM	08/09/08*

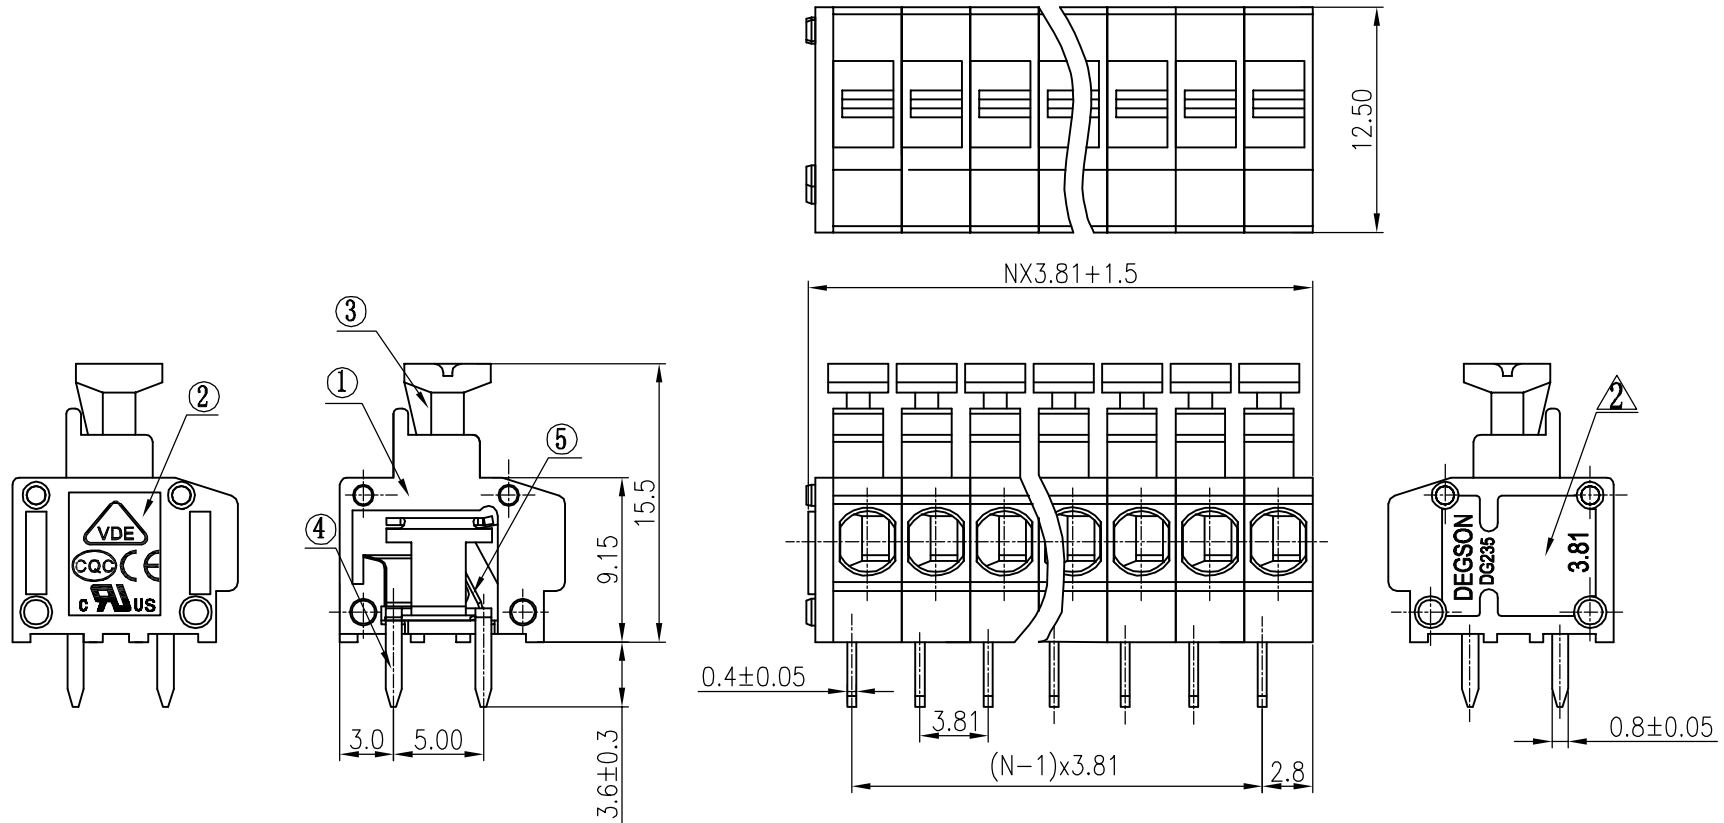

Notes:

1. Pitch: 3.81mm , Poles: XXP
2. Rated voltage/current: UL 300V/5A
VDE 250V/10A
3. Operation temperatures: -40°C ~ +105°C
4. Withstanding Voltage: AC2000V/1Min
5. Insulation Resistance: 5000MΩ / DC1000V
6. Wire Range: 20~18AWG, 1.5mm²
7. Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm					
	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150		
to 6							∩	
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	
							0.05/10	

5	DG235-3.81-Clamp	X000000390 (H)	XX	Stainless Steel	
4	DG235-3.81-Pin header	3007B00010 (H)	XX	Phosphor Bronze	SnCe plated
3	DG235-3.81 Button	3007D0Y01A (H)	XX	PA66	UL94V-0
2	DG235 Cover	3008C0Y01A (H)	1	PA66	UL94V-0
1	DG235-3.81 Housing	3007A0Y01A (H)	XX	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES

DETACHED LISTS	MM (INCH)	DFTO Zhwm	DATE 08/02/04	宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD
	TOLERANCES EXCEPT AS NOTED	CHKD	DATE	
		MFO	DATE	
		APPVL	DATE	
	MM			NAME
	.0 ±	±		DG235-3.81-XXP-1Y-00A(H)
	.00 ±	±		DRAWING NO. DG235-3.81-E02
	.000 ±	±		/PART NO.
	ANGLES ± 1°	G.E. :		SIZE A3
	THIRD ANGLE PROJECTION	FINISH :		REV T2
		SCALE : 1:1		08/09/08*
			DO NOT SCALE DRAWING	SHEET 1 OF 1