


## SCHOTTKY BARRIER RECTIFIER

### FEATURES

- Fast switching.
- Low forward voltage, high current capability.
- Low power loss, high efficiency.
- High current surge capability.
- High temperature soldering guaranteed:  
250/10 seconds, 0.375" (9.5mm) lead length  
at 5 lbs. (2.3kg) tension.

### MECHANICAL DATA

- Case: Transfer molded plastic
- Epoxy: UL94V - 0 rate flame retardant.
- Polarity: Color band denoted cathode end.
- Lead: Plastic axial lead, solderable per MIL - STD - 202E  
method 208C
- Mounting position : Any
- Weight: 0.012 ounce, 0.33 gram

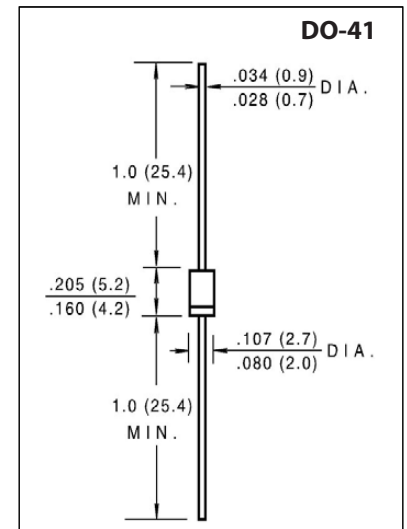

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Ratings at 25 °C ambient temperature unless otherwise specified Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load derate current by 20%

		SYMBOLS	1N5817	1N5818	1N5819	UNIT
Maximum Repetitive Peak Reverse Voltage		$V_{RRM}$	20	30	40	Volts
Maximum RMS Voltage		$V_{RMS}$	14	21	28	Volts
Maximum DC Blocking Voltage		$V_{DC}$	20	30	40	Volts
Maximum Average Forward Rectified Current 0.375" (9.5mm) Lead length at $T_L = 90^\circ\text{C}$		$I_{(AV)}$	1.0			Amp
Peak Forward Surge Current 8.3ms single half sine - wave superimposed on rated load (JEDEC method )		$I_{FSM}$	25			Amps
Maximum Instantaneous Forward Voltage (Note 1) at	1.0A	$V_F$	0.450	0.550	0.600	Volts
Maximum DC Reverse Current at rated DC blocking voltage (Note 1)	$T_A = 25^\circ\text{C}$	$I_R$	0.5			mA
	$T_A = 100^\circ\text{C}$		10			
Typical Junction Capacitance (Note 2 )		$C_j$	110			pF
Typical Thermal Resistance (Note 3)		$R_{\theta JA}$	50			$^\circ\text{C}/\text{W}$
Operating and Storage Temperature Range		$T_J, T_{STG}$	(-55 to +125)			$^\circ\text{C}$

### NOTES:

1. Pulse test: 300  $\mu\text{s}$  pulse width, 1% duty cycle.
2. Measured at 1MHz and applied reverse voltage of 4.0 volts.
3. Thermal resistance from junction to ambient P.C.B. mounted with  
0.375" (9.5mm) lead length with 1.5" x 1.5" (38 X 38mm) copper pads.

## SCHOTTKY BARRIER RECTIFIER

### RATING AND CHARACTERISTIC CURVES 1N5817 - 1N5819

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

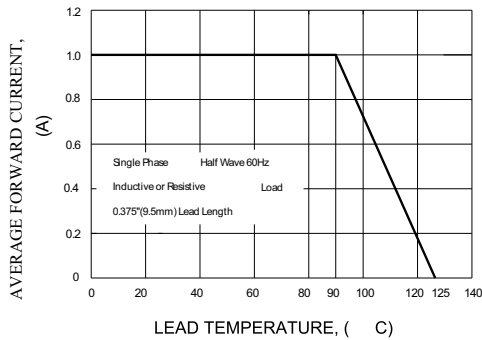


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

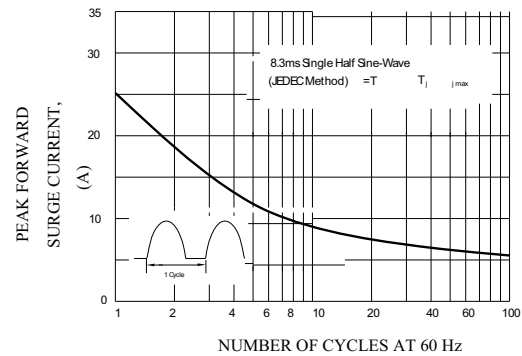


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

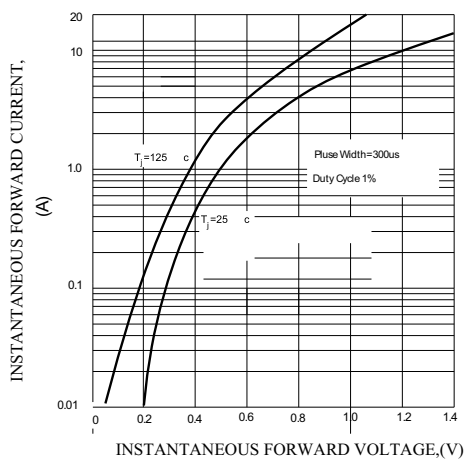


FIG.4-TYPICAL REVERSE CHARACTERISTICS


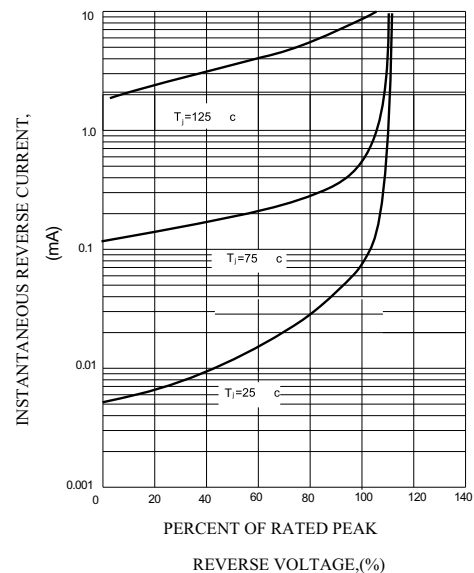


FIG.5-TYPICAL JUNCTION CAPACITANCE

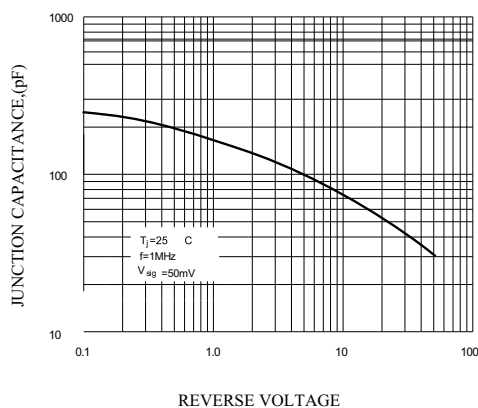

#### Disclaimer

All product, product specifications and data are subject to change without notice to improve reliability, function or design or otherwise.